



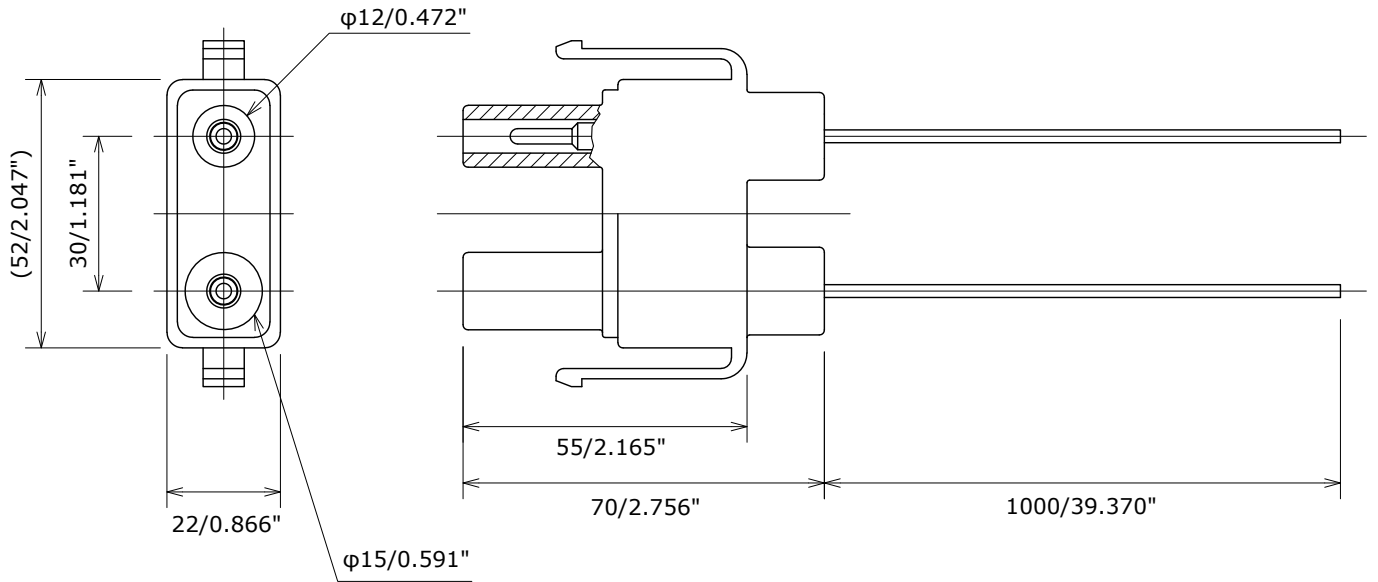


Example of Mating (1)
When Not Using a Panel

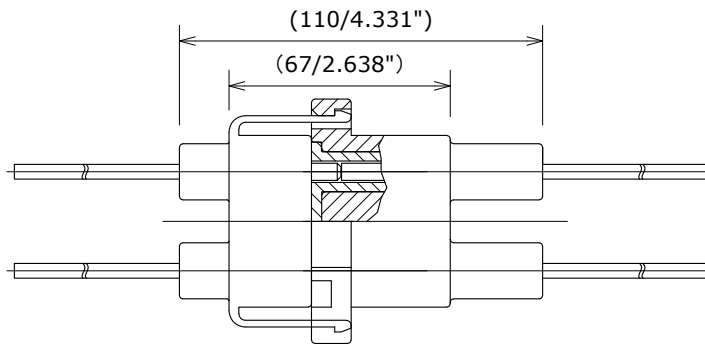

SPECIFICATION

CURRENT RATING : 3A
 DIELECTRIC STRENGTH : DC 30KV 1 min at sea level
 INSULATION RESISTANCE : DC1000V 100M Ω min
 CONTACT RESISTANCE : 3m Ω max
 OPERATING TEMPERATURE : -10 to +80°C

Date		JC ELECTRONICS CORPORATION	
2025/07/15			
Materials Finish		WIRE INSULATOR PLUG PIN	Silicon High Temp. Thermoplastic Brass ,Au plating over Ni
Dimensions Style mm /inch		Title	High Voltage Connectors with Wire
 Third Angle Projection		Part Number	HVL-P-2P-30-1000
Rev.No	0		