




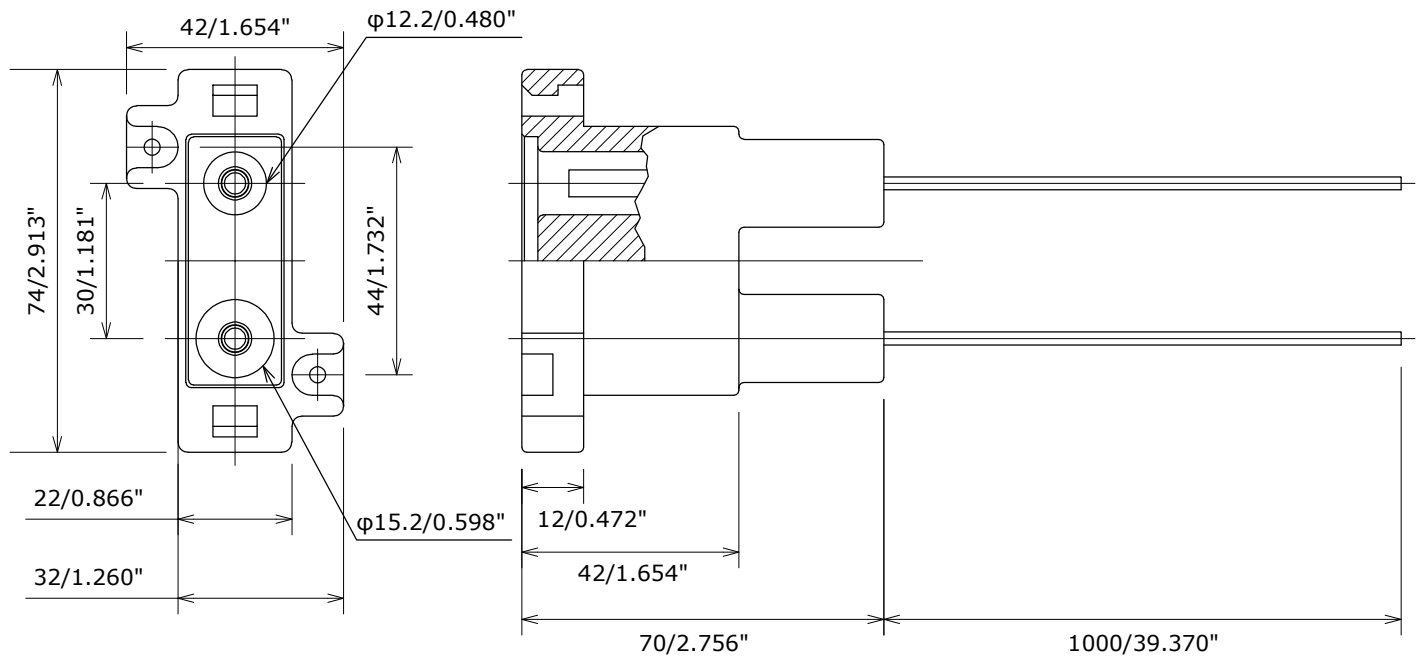

Example of Mating (1)
When Not Using a Panel

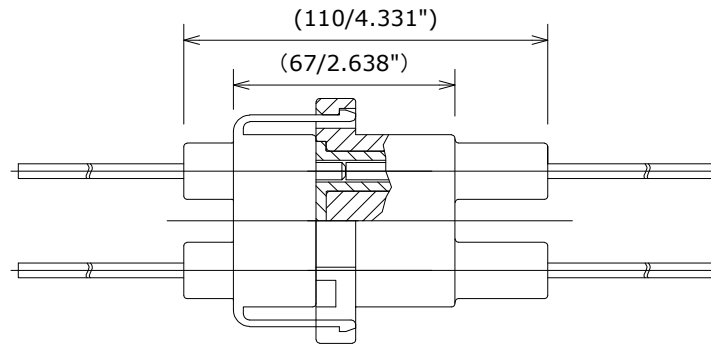


Example of Mating (2)
When Using a Panel

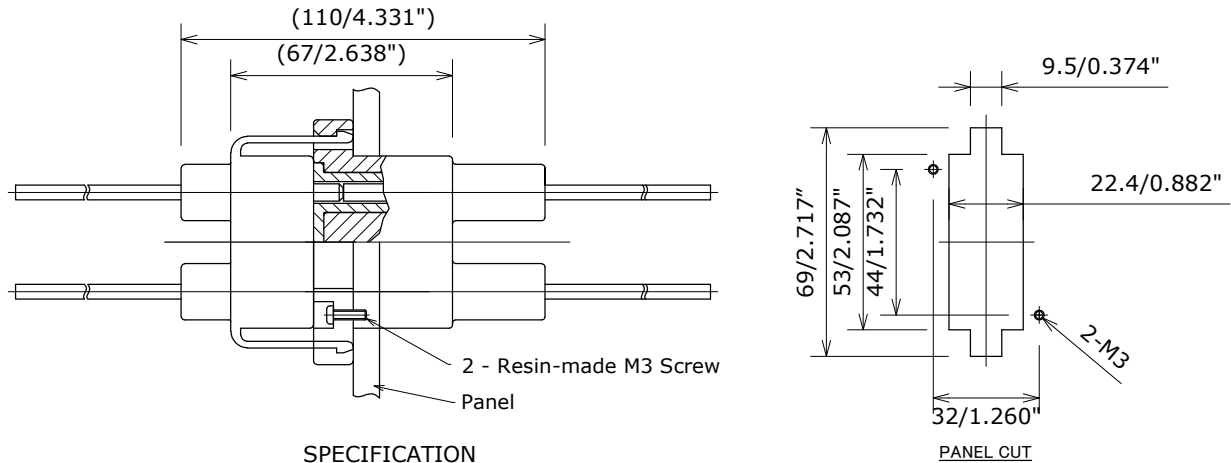

SPECIFICATION

CURRENT RATING : 3A
 DIELECTRIC STRENGTH: DC 30KV 1 min at sea level
 INSULATION RESISTANCE : DC1000V 100M Ω min
 CONTACT RESISTANCE : 3m Ω max
 OPERATING TEMPERATURE : -10 to +80°C

Date		JC ELECTRONICS CORPORATION	
2025/07/15			
Materials Finish		WIRE INSULATOR SOCKET PIN	Silicon High Temp. Thermoplastic Brass ,Au plating over Ni
Dimensions Style mm /inch		Title High Voltage Connectors with Wire	
 Third Angle Projection		Part Number HVL-S-2P-30-1000	
Rev.No	0		