
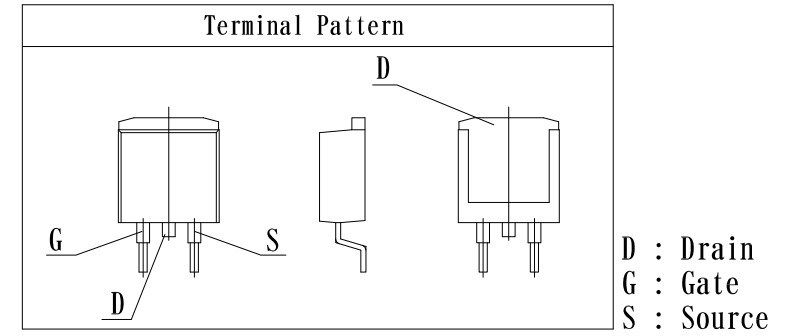
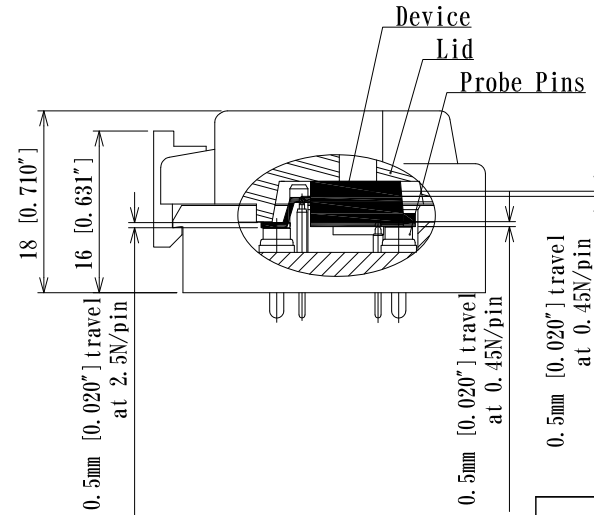


Thru holes GK, DK, SK are for Kelvin contact.
 If Kelvin Contact is not required,
 these holes are not necessary.

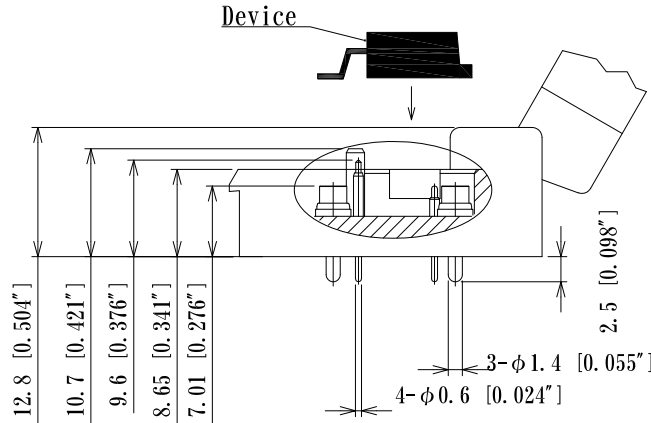

SPECIFICATION

- DURABILITY** : 100,000 cycle (Mechanical)
- CONTACT RESISTANCE** : 50mΩ max (Socket initial)
- CURRENT RATING** : 10A at 25°C (Between Drain and Source)
 Room temperature with 30°C T-Rise
- WITHSTANDING VOLTAGE** : DC2000V 1 minute at 25°C
- INSULATION RESISTANCE** : 500MΩ min at DC500V
- OPERATING TEMPERATURE** : -40°C ~ +200°C (Including Probe pin T-Rise.)

Date		JC ELECTRONICS CORPORATION
2024/06/25		
Materials Finish		Body : High Temp Thermoplastic Other parts : SUS, etc.
Dimensions Style mm [inch]		Title T0263 TEST SOCKET
Third Angle Projection		Part Number
Rev. No		GD18-T0263-K-109
		0