


Specifications


Durability : 10,000 cycles min.
Contact resistance : 20mΩ max
Operating temperature : -55°C~+175°C



Isometric view

Note

1. First, fix the product to the PCB with M1.6 bolt and nut. After that, perform the soldering and cable wiring processes.
2. Bolt and nut are not included.
3. The required bolt length varies depending on the usage. Please prepare a M1.6 bolt with a length that suits your usage.

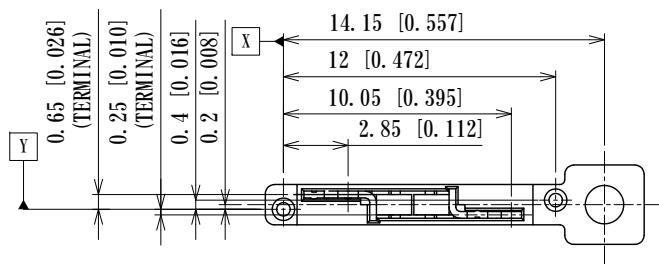

Date		JC ELECTRONICS CORPORATION
2024/03/04		
Materials Finish		TERMINAL : Copper Alloy, t0.3 Au Plating over Ni INSULATOR : Heat Resisting Plastics
Dimensions Style mm [inch]		Title POWER MODULE SOCKET (1.778 pitch)
Third Angle Projection		Part Number PMS-1778P-S
Rev. No	0	